



Australian Government

S.N. 10/589,694
Confirmation No.: 9650
Art No. 3785
UO16438-3

Patent Office
Canberra

I, JENNY SHANNON, EXAMINATION SUPPORT AND SALES hereby
certify that annexed is a true copy of the Provisional specification in connection
with Application No. 2004901054 for a patent by MONITEC PTY LTD as filed
on 01 March 2004.



WITNESS my hand this
Ninth day of August 2011

JENNY SHANNON
EXAMINATION SUPPORT AND SALES

AUSTRALIA

Patents Act 1990

PROVISIONAL SPECIFICATION FOR THE INVENTION ENTITLED:

Method and Apparatus for Environmental Control

Name and Address of Applicant:

**MoniTec Pty Ltd, 75/159 Ridgecrop Drive, Castle Hill, New South Wales, 2154,
Australia**

Names of Inventors:

Neil John Barrett and Bruce Nation Beilby

This invention is best described in the following statement:

METHOD AND APPARATUS FOR ENVIRONMENTAL CONTROL

Field of the Invention

5 The present invention relates to monitoring and controlling environmental parameters generally and more particularly to environmental control in chicken houses.

Background

10 Environmental control provides significant benefits when applied to production cycles of chickens and other species and varieties of animals and plants. Whilst increased mortality rates result from extreme environmental conditions, optimal environmental conditions positively impact on growth and general well being. For example, feed conversion and weight gain ratios can be improved through environmental control.

15 Three main inter-related environmental parameters have a significant influence in a chicken house, namely temperature, humidity and wind velocity. Specifically, links exist between temperature, humidity, and bird age in terms of heat stress and between wind velocity and bird age in terms of wind chill.

20 The temperature that the birds actually experience as opposed to the temperature directly measured within a chicken house is known as a perceived temperature. Generally, chickens feel warmer as the humidity increases and cooler as the wind velocity increases. Age also has a direct bearing on the effects of these parameters. For example, young chicks are sensitive to wind chill and are easily over-cooled if exposed to wind. Stress resulting from over-cooling may result in reduced weight gain
25 throughout a production cycle (nominally 6-7 weeks).

Conventional environmental control systems use measured temperature as an input to a feedback control loop to control or regulate ventilation cooling in a chicken house. Chicken houses are generally cooled by the activation and de-activation of fans that blow air down the length of the house. The wind cools the birds by way of a wind
30 chill effect. Air may also be brought in through pads which have been sprayed with water to further aid cooling in an evaporative cooling process.

Whilst such rudimentary control may be capable of maintaining temperature levels within certain limits and influencing humidity levels to a limited degree, effective humidity control requires capital-intensive air conditioning equipment and is thus not generally used in the agricultural industry.

5 There exists a standard heat stress equation for human comfort levels that describes the relationship between temperature (dry bulb), Heat Index (HI) and humidity. Fig. 4 shows a graph of HI curves as a function of temperature and humidity levels, as well as the locus of points indicating the points at which $HI = T$.

10 The U.S. Weather Services uses the standard equation for Heat Index (HI), with constants adapted for human comfort levels, in the following form:

$$\begin{aligned} HI = & -42.379 + 2.04901523T + 10.14333127H - 0.22475541TH \\ & - 6.83783 \times 10^{-3}T^2 - 5.481717 \times 10^{-2}H^2 + 1.22874 \times 10^{-3}T^2H \\ & + 8.5282 \times 10^{-4}TH^2 - 1.99 \times 10^{-6}T^2H^2 \end{aligned}$$

15

where: T = ambient dry bulb temperature in °F, and
 H = relative humidity (%)

20 A Heat Index of greater than 130°F (54.4°C) is indicative of conditions that are extremely dangerous for human beings.

25 Whilst it is desirable to automate control of environmental parameters in a feedback control loop, a difficulty arises in unifying the parameters in a single solution due to the complexity of the standard heat stress equation. Further, the standard equation is unstable in that small variations to constants in the equation result in large variations in output of the equation. A need thus exists for an improved method and apparatus for controlling environmental parameters of temperature, relative humidity and wind chill. Another need exists for an improved method and apparatus for controlling environmental parameters in a chicken house.

30

Summary

According to an aspect of the present invention, there is provided an automated method for controlling environmental parameters in a defined environment. The method comprises the steps of measuring values of temperature, relative humidity,
5 and wind velocity in the environment, calculating a value of perceived temperature as a function of the measured values, and controlling the environmental parameters based on the calculated value.

The method may comprise the further steps of calculating an optimum perceived temperature based on the age of the chickens, and calculating hot and cold
10 stress limits for the chickens based on the optimum perceived temperature.

The method may still further comprise the step of calculating stress levels experienced by the chickens, wherein the stress levels are calculated as a function of the hot and cold stress limits and the calculated value of perceived temperature.

The method may yet further comprise the step of calculating a value of
15 accumulated stress of said chickens during a production cycle.

According to another aspect of the present invention, there is provided an apparatus for controlling environmental parameters in a defined environment. The apparatus comprises a memory unit for storing data and instructions to be performed by a processing unit and a processing unit coupled to the memory unit. The processing
20 unit is programmed to obtain measured values of temperature, relative humidity, and wind velocity relating to the environment, calculate a value of perceived temperature as a function of the measured values, and provide the calculated value of perceived temperature for controlling the environmental parameters.

In yet another aspect of the present invention, there is provided a computer
25 program product having a computer readable medium having a computer program recorded therein for controlling environmental parameters in a defined environment. The computer program product comprises computer program code means for measuring values of temperature, relative humidity, and wind velocity in the environment, computer program code means for calculating a value of perceived
30 temperature as a function of the measured values, and computer program code means

for outputting the calculated value of perceived temperature for controlling the environmental parameters.

Brief Description of the Drawings

5 Features and preferred embodiments of the present invention are described hereinafter, by way of example only, with reference to the accompanying drawings in which:

Fig. 1 is a block diagram of a system for monitoring and controlling environmental parameters;

10 Fig. 2 is a flow diagram of a method for environmental control;

Fig. 3 is a flow diagram of a method for environmental control in a chicken house; and

Fig. 4 is a graph of temperature as a function of relative humidity showing standard heat index curves for human comfort levels.

15

Detailed Description

Embodiments of methods and apparatuses are described hereinafter for monitoring and controlling environmental parameters. While the methods and apparatuses are described with specific reference to environmental control in a chicken house, it is not intended that the present invention be limited to such application as the principles of the present invention have general applicability to environmental control for numerous other purposes. For example, embodiments of the present invention may be applied to agricultural environments for the production of various animals and plants. Embodiments of the present invention may also be practised to control human comfort levels.

25

As stated hereinbefore, a difficulty exists in unifying environmental parameters in a single solution due to the complexity of the standard heat stress equation.

Within the continuum of values that the standard heat stress equation generates, there exists a locus of points on which the heat stress index (otherwise known as the perceived temperature) is equal to the measured temperature. However, the individual points relate to different values of humidity. A practical unified solution is aided when the points on the locus, at which the measured temperature equals the perceived

30

temperature, occur at a constant value of humidity. For convenience, this value may be defined as the 50% point of relative humidity where the measured temperature (ignoring wind chill) is equal to the perceived temperature. Alternatively, other values of relative humidity can be used. Consequently, the optimum performance temperature for chickens, which is generally defined as a function of bird age and at a particular value of relative humidity, may be transformed to a set of perceived temperature values. This approach simplifies calculations to determine the accumulated stress on the chickens as the measured data and initial calculations relate to the 50% humidity level.

Multiple regression analysis was used to minimise the complexity of the humidity/temperature equation as well as to ensure that the derived constants meet the requirement that Perceived Temperature (PT) equals T at a constant humidity of 50%. This aids in the derivation of PT, which is the equivalent temperature that would be perceived as if the relative humidity was at 50%.

The error introduced due to simplification of the standard temperature and humidity heat stress equation is insignificant when taking into account errors generated in measuring the actual parameters, the non-uniformity of the environmental conditions in chicken houses, and the inherent error within the standard equation. The error within the standard equation results from approximation of the actual value of heat index (HI). For example, the inherent error increases when the humidity is particularly low or particularly high.

Advantageously, the foregoing approach enables the temperature perceived by the birds, as a function of actual measured temperature, humidity, wind velocity and bird age to be used in a feedback control loop to monitor and control the stress levels of the birds as the perceived temperature is compared with optimal environmental conditions.

Fig. 1 shows a block diagram of a system for monitoring and controlling environmental parameters. A sensor interface 120 is coupled to a temperature sensor 142, a humidity sensor 144, and a wind velocity sensor 146 via a bus interconnection 130. Other sensor types and other forms of coupling of the sensors to the sensor interface may also be practised, as would be understood by persons skilled in the art.

For example, sensors for detecting ammonia levels may also be used to detect levels of ammonia that have an adverse effect on the birds and thus contribute to their stress levels. Further, it is not essential that the sensors are networked.

5 A monitoring device 110 is coupled to the sensor interface 120 and comprises a processing unit, comprising one or more microprocessors, and memory for storing a software program and incoming data from the sensors. The processing unit performs computational procedures, and outputs data on command to a local display interface 170, a communications interface 160 and a feedback control interface 150. The memory may comprise one or more of read-only memory (ROM), electrically erasable
10 programmable read-only memory (EEPROM), random access memory (RAM), flash memory, and/or any other form of memory known in the art. The memory or a portion of the memory may optionally be integrated in the one or more microprocessors.

During use, the sensors 142, 144 and 146 are scanned by the monitoring device 110 to input current values of temperature, humidity, and wind velocity, respectively.
15 The input values are used for performing calculations. Both the input data and the calculated values may be logged or stored in memory and may be displayed on a display 175 via the local display interface 170 or accessed by a remote computer 165 via the communications interface 160. The input data and calculated values may be logged or stored in memory with a date/time stamp generated from a real-time clock
20 and/or when a change in an input value is detected. The remote computer 165 may be coupled to the communications interface 160 via a network (not shown), such as a local area network (LAN), a wide area network (WAN), a wireless network, the Internet, an intranet, and/or any other communication network known in the art.

Remote monitoring, data downloads, and software program uploads may be
25 performed using the remote computer 190. Local interrogation data in the monitoring device 110 can be performed using the display and keypad 175.

The apparatus 100 shown in Fig. 1 receives environmental parameter values from the sensors 142, 144, and 146, performs calculations or computations based on those values, and outputs a temperature signal to an environmental controller 155 via a
30 feedback control interface 150 integrated in the apparatus 100. The feedback control interface 150 enables transformation of data and/or signals (e.g., level, protocol, etc.)

to accommodate the specifications of existing environmental controllers. The temperature signal is used by the environmental controller 155 for closed loop control of environmental parameters. For example, the environmental controller 155 may switch fans on and off to generate wind chill. In an alternative embodiment, the environmental controller 155 may be integrated in the apparatus 100.

Alarm conditions that provide warning of excessive values or variations (i.e., process limits) in the environmental parameters may be locally or remotely set by means of the display and key pad 175 and the remote computer 165, respectively. Use of a perceived temperature to trigger process limits enables the apparatus to function in high humidity conditions (at low temperatures) without setting off humidity alarms.

In one embodiment of the system shown in Fig. 1, the monitoring device 110 comprises an embedded 133 MHz x86-based STPC Atlas processor linked via an ISA bus to flash disc memory for hosting an operating system. The display 175 comprises a 2 line x 20 character liquid crystal display (LCD) and a Hitachi HD44780 controller. The processor uses ANSI standard commands to control information displayed on the display 175 via the local display interface 170, which comprises an RS-232 serial data port. The processor also receives commands from the keypad 175 via the local display interface 175, implemented as an RS-232 serial data port. The remote computer 165 communicates with the processor via the communications interface 160, implemented as a 10/100 BaseT Ethernet Interface, and an internal PCI bus. The environmental controller 155 is controlled via the feedback control interface 150, implemented as a parallel data port. The sensors 142, 144 and 146 are coupled to the sensor interface 120 by way of bus interconnection 130, which comprises a 3-wire bus that enables connection of multiple sensors via a single cable. The sensor interface 120 interfaces to the processor by way of an RS-232 serial data port. The foregoing description comprises one embodiment of the system shown in Fig. 1 and is thus not intended to limit the scope of the present invention. Persons skilled in the art would readily recognise that numerous other hardware platforms and components may be used to practise the present invention.

Fig. 2 shows a flow diagram of a method for environmental control. At step 210, measured values of temperature, wind velocity, and relative humidity (%) are

obtained. The wind chill is determined based on measured values of wind velocity at step 220 and the measured temperature values are reduced by the wind chill determined in step 220, at step 230. At step 240, the perceived temperature is calculated as a function of the relative humidity and the wind chill-compensated temperature that is calculated in step 230. The perceived temperature may be used to control environmental conditions at step 250.

Fig. 3 shows a flow diagram of a method for environmental control in a chicken house. At step 310, measured values of temperature, wind velocity, and relative humidity (%) are obtained. The wind chill is calculated at step 320 according to the following equation:

$$WC = V^p(a + bT + cT^2 + dT^3 + eT^4) \quad (1)$$

where: T = measured temperature ($^{\circ}\text{C}$),

V = wind velocity (m/s), and

a, b, c, d, e and p are variables dependent upon the age of the birds.

In one particular embodiment, the variables used are as follows:

$$a = n_a \tilde{A} + m_a \quad n_a = -0.03233, \quad m_a = 11.254$$

$$b = n_b \tilde{A} + m_b \quad n_b = -0.0009538, \quad m_b = -0.05311$$

$$c = n_c \tilde{A} + m_c \quad n_c = 0.0005006, \quad m_c = -0.1045$$

$$d = n_d \tilde{A} + m_d \quad n_d = -0.00002959, \quad m_d = 0.006077$$

$$e = n_e \tilde{A} + m_e \quad n_e = 4.466\text{E-}07, \quad m_e = -0.00008901$$

$$p = n_p \tilde{A} + m_p \quad n_p = -0.0009859, \quad m_p = 0.6007$$

where: $\tilde{A} = rA + sA^2 + tA^3 + uA^4$,

A = age of bird (days), and

$$r = 0.05850, s = 0.02605, t = 0.001399, u = -2.404\text{E-}05$$

The age of the birds is tracked during a production cycle. In one embodiment, an initial estimate of the average age of the birds is input to the apparatus 100 for automatic adjustment by means of a clock reference.

5 The constants in equation 1 are stored in memory and may change with breed of chicken and production operational preferences such as optimal perceived temperatures and stress levels.

To calculate the wind chill (WC) in equation (1), it is necessary to input the age of the birds (A), the temperature (T), and wind velocity (V). When the calculated value of wind chill (WC) is negative, it is assumed that the wind chill is zero. Also,
10 when the age of the birds (A) exceeds 48 days then $\bar{A} = 92$.

At step 330, the wind chill-compensated temperature (T_{wc}) is calculated according to the following equation:

15
$$T_{wc} = T - WC$$

where: T = measured temperature ($^{\circ}\text{C}$), and

WC = the wind chill calculated in step 310.

20 At step 340, the wind chill-compensated temperature (T_{wc}) calculated in step 330 is used to calculate the perceived temperature of the birds according to the following equation:

$$PT = T_{wc}(f + gH + hH^2) + iH + jH^2 + k \quad (2)$$

25

where: H = relative humidity (%), and

$f = 1.4195$, $g = -0.0136$, $h = 0.0001043$, $i = 0.7026$,

$j = -0.00402$, and $k = -25.07$

Adult birds can comfortably adapt to an environment within a perceived temperature range of 19 to 27 °C. At a perceived temperature of PT = 46 °C, adult birds experience a high mortality rate in less than 2 hours.

- 5 At step 350, the optimum perceived temperature (T_{opt}), which reflects the optimum temperature (at 50% RH) for the production of the birds and varies depending on the age of the birds, is calculated according to the following equation:

10
$$T_{opt} = z + \frac{v}{1 - wA + xA^2 - yA^3} \quad (3)$$

where: A = the age of the birds in days, and

$$v = 10.67, w = 0.03537, x = 0.01169, y = 0.0001271, z = 21.96.$$

- 15 If A is greater than 39 days then $T_{opt} = 23$ °C.

- At step 360, the perceived temperature (PT) is used as an input to calculate stress levels of the birds by comparing the perceived temperature (PT) to the optimal perceived temperature (T_{opt}) and the limits at which stress starts and continues to occur. A first set of hot and cold stress limits (SH and SC) correspond to temperature levels above and below the optimum perceived temperature (T_{opt}), respectively, when stress on the birds first becomes noticeable. A second set of hot and cold stress limits (DH and DC) correspond to temperature levels above and below the optimal perceived temperature (T_{opt}), respectively, when damage to the birds and/or excessive bird mortality after 7 hours of maintaining a high or low temperature occurs.
- 20
- 25

The first set of limits where stress starts to occur, are defined in equations 4 and 5 hereinafter:

30
$$\begin{aligned} SH &= \varepsilon + \phi T_{opt} & \text{where: } \varepsilon &= 9.98, \phi = 0.74 & (4) \\ SC &= \gamma + \eta T_{opt} & \text{where: } \gamma &= -10.24, \eta = 1.28 & (5) \end{aligned}$$

The second set of limits where damage starts to occur (at 50% RH), are defined in equations 6 and 7 hereinafter:

$$\begin{aligned} \text{DH} &= \alpha + \beta T_{\text{opt}} & \text{where: } \alpha &= 36.09, \beta = 0.27 & (6) \\ \text{DC} &= \chi + \delta T_{\text{opt}} & \text{where: } \chi &= -15.69, \delta = 1.03 & (7) \end{aligned}$$

If the perceived temperature (PT) is less than the cold stress limit (SC) then the cold stress level (S_C) is defined according to equation 8, hereinafter:

$$S_C = \frac{\lambda \Delta t (SC - PT)}{(SC - DC)} \quad (8)$$

where: $\lambda = 0.00417$, and

Δt = time interval(s) between measurements

If the perceived temperature (PT) is greater than the hot stress limit (SH) then the hot stress level (S_H) is defined according to equation 9, hereinafter:

$$S_H = \frac{\lambda \Delta t (PT - SH)}{(DH - SH)} \quad (9)$$

where: $\lambda = 0.00417$, and

Δt = time interval(s) between measurements

If the perceived temperature (PT) lies between the two stress limits SH and SC then both S_C and S_H equal zero. This is known as the thermal comfort zone. Temperatures above and below the thermal comfort zone cause increases in heat and cold stress, respectively.

At step 370, the hot and cold stress levels calculated in step 360 are accumulated (for each measurement cycle) to provide a value of accumulated stress (AS), which

impacts on production efficiency. The accumulated stress (AS) is calculated according to equation 10, hereinafter:

$$AS = \Sigma(S_C + S_H) \quad (10)$$

5

The accumulated stress (AS) values should ideally be less than 10 at the end of a production cycle. Values in the region of 100 reflect worst case scenarios.

Advantageously, the simplified heat stress equations described hereinbefore enable the calculations to be performed directly, as opposed to iteratively, and substantially in real time by a microprocessor-based apparatus or system. As the equations include terms raised to powers and require floating point arithmetic, an embedded personal computer (PC) is an ideal computing platform for practising the invention. However, those skilled in the art will appreciate that other standard or proprietary computing platforms or hardware may be used to practise embodiments of the invention.

15

Conclusion

Embodiments of methods and apparatuses for monitoring and controlling environmental parameters have been described hereinbefore. However, various alterations and modifications can be made to the embodiments described herein, as would be apparent to one skilled in the relevant art in the light of this disclosure, without departing from the spirit and scope of the invention.

20

In certain embodiments, clusters of sensors are distributed throughout a chicken house or other monitored area with the outputs of those sensors averaged to take into account non uniformities throughout the chicken house.

25

In other embodiments, stress values are determined from a number of sensor clusters. Such embodiments are useful if the chickens are separated (e.g., by fencing) or if a plurality of chicken houses are monitored by the same apparatus. In such cases the temperature feedback loop may be driven by an average value of perceived temperature or a perceived temperature value from a specific cluster of sensors.

30

By modifying the constants in the simplified equations described hereinbefore, embodiments of the present invention may be applied to monitoring amounts of

surplus energy available for growth and weight gain of a broad range of agricultural processes such as the production of poultry, animals including pigs, crops and plants. Other embodiments may also be used for monitoring and/or controlling human comfort levels.

- 5 *(Australia Only)* In the context of this specification, the word "comprising" means "including principally but not necessarily solely" or "having" or "including", and not "consisting only of". Variations of the word "comprising", such as "comprise" and "comprises" have correspondingly varied meanings.

The claims defining the invention are as follows:

1. An automated method for controlling environmental parameters in a defined environment, said method comprising the steps of:
 - 5 measuring values of temperature, relative humidity, and wind velocity in said environment;
 - calculating a value of perceived temperature as a function of said measured values; and
 - controlling said environmental parameters based on said calculated value.
- 10 2. The method of claim 1, wherein said defined environment comprises a chicken house and said perceived temperature comprises a temperature perceived by chickens in said chicken house.
- 15 3. The method of claim 2, wherein said perceived temperature is calculated as a function of age of said chickens.
- 20 4. The method of claim 2 or claim 3, wherein said step of controlling comprises activation and de-activation of fans and related equipment in said chicken house.
- 25 5. The method of claim 2 or claim 3, comprising the further steps of:
 - calculating an optimum perceived temperature based on the age of said chickens; and
 - calculating hot and cold stress limits for said chickens based on said optimum perceived temperature, wherein said hot and cold stress limits correspond to temperature values above and below said optimal perceived temperature, respectively.
- 30 6. The method of claim 5, comprising the further step of calculating stress levels experienced by said chickens as a function of said stress limits and said calculated perceived temperature.

7. The method of claim 6, comprising the further step of calculating a value of accumulated stress of said chickens during a production cycle.
- 5 8. An apparatus for controlling environmental parameters in a defined environment, said apparatus comprising:
- a memory unit for storing data and instructions to be performed by a processing unit; and
- a processing unit coupled to said memory unit, said processing unit programmed
- 10 to:
- obtain measured values of temperature, relative humidity, and wind velocity relating to said environment;
- calculate a value of perceived temperature as a function of said measured values; and
- 15 provide said calculated value of perceived temperature for controlling said environmental parameters.
9. The apparatus of claim 8, further comprising an interface for providing said calculated value of perceived temperature to an environmental controller.
- 20 10. The apparatus of claim 8, further comprising a controller for controlling said environmental parameters in response to said calculated value of perceived temperature.
- 25 11. The apparatus of claim 8, wherein said defined environment comprises a chicken house and said perceived temperature comprises a temperature perceived by chickens in said chicken house.
- 30 12. The apparatus of claim 11, wherein said processing unit is further programmed to calculate said perceived temperature as a function of age of said chickens.

13. The apparatus of claim 11 or claim 12, wherein said processing unit is programmed to activate and de-activate fans and related equipment in said chicken house.
- 5 14. The apparatus of claim 11 or claim 12, wherein said processing unit is further programmed to:
- calculate an optimum perceived temperature based on the age of said chickens;
 - and
 - calculate hot and cold stress limits for said chickens based on said optimum
- 10 perceived temperature, wherein said hot and cold stress limits correspond to temperature values above and below said optimal perceived temperature, respectively.
- 15 15. The apparatus of claim 14, wherein said processing unit is further programmed to calculate stress levels experienced by said chickens as a function of said stress limits and said calculated perceived temperature.
16. The apparatus of claim 15, wherein said processing unit is further programmed to calculate a value of accumulated stress of said chickens during a production cycle.
- 20 17. A computer program product having a computer readable medium having a computer program recorded therein for controlling environmental parameters in a defined environment, said computer program product comprising:
- computer program code means for measuring values of temperature, relative humidity, and wind velocity in said environment;
 - 25 computer program code means for calculating a value of perceived temperature as a function of said measured values; and
 - computer program code means for outputting said calculated value of perceived temperature for controlling said environmental parameters.

18. The computer program product of claim 17, further comprising computer program code means for controlling said environmental parameters in response to said calculated value of perceived temperature.
- 5 19. The computer program product of claim 17, wherein said defined environment comprises a chicken house and said perceived temperature comprises a temperature perceived by chickens in said chicken house.
20. The computer program product of claim 19, wherein said perceived temperature
10 is calculated as a function of age of said chickens.
21. The computer program product of claim 19 or claim 20, further comprising computer program code means for activating and de-activating fans and related equipment in said chicken house.
- 15 22. The computer program product of claim 19 or claim 20, further comprising computer program code means for:
- calculating an optimum perceived temperature based on the age of said chickens; and
- 20 calculating hot and cold stress limits for said chickens based on said optimum perceived temperature, wherein said hot and cold stress limits correspond to temperature values above and below said optimal perceived temperature, respectively.
23. The computer program product of claim 22, further comprising computer
25 program code means for calculating stress levels experienced by said chickens as a function of said stress limits and said calculated perceived temperature.
24. The computer program product of claim 23, further comprising computer
30 program code means for calculating a value of accumulated stress of said chickens during a production cycle.

25. The computer program product of claim 17, wherein said perceived temperature comprises a temperature perceived by a living being in said defined environment, said living being selected from the group of living beings:

5 human beings;
animals;
plants;
crops;
pigs; and
poultry.

10

26. The method of claim 1, wherein said perceived temperature comprises a temperature perceived by a living being in said defined environment, said living being selected from the group of living beings:

15 human beings;
animals;
plants;
crops;
pigs; and
poultry.

20

27. The apparatus of claim 8, wherein said perceived temperature comprises a temperature perceived by a living being in said defined environment, said living being selected from the group of living beings:

25 human beings;
animals;
plants;
crops;
pigs; and
poultry.

30

Dated 1 March, 2004

MoniTec Pty Ltd

**Patent Attorneys for the Applicant/Nominated Person
SPRUSON & FERGUSON**

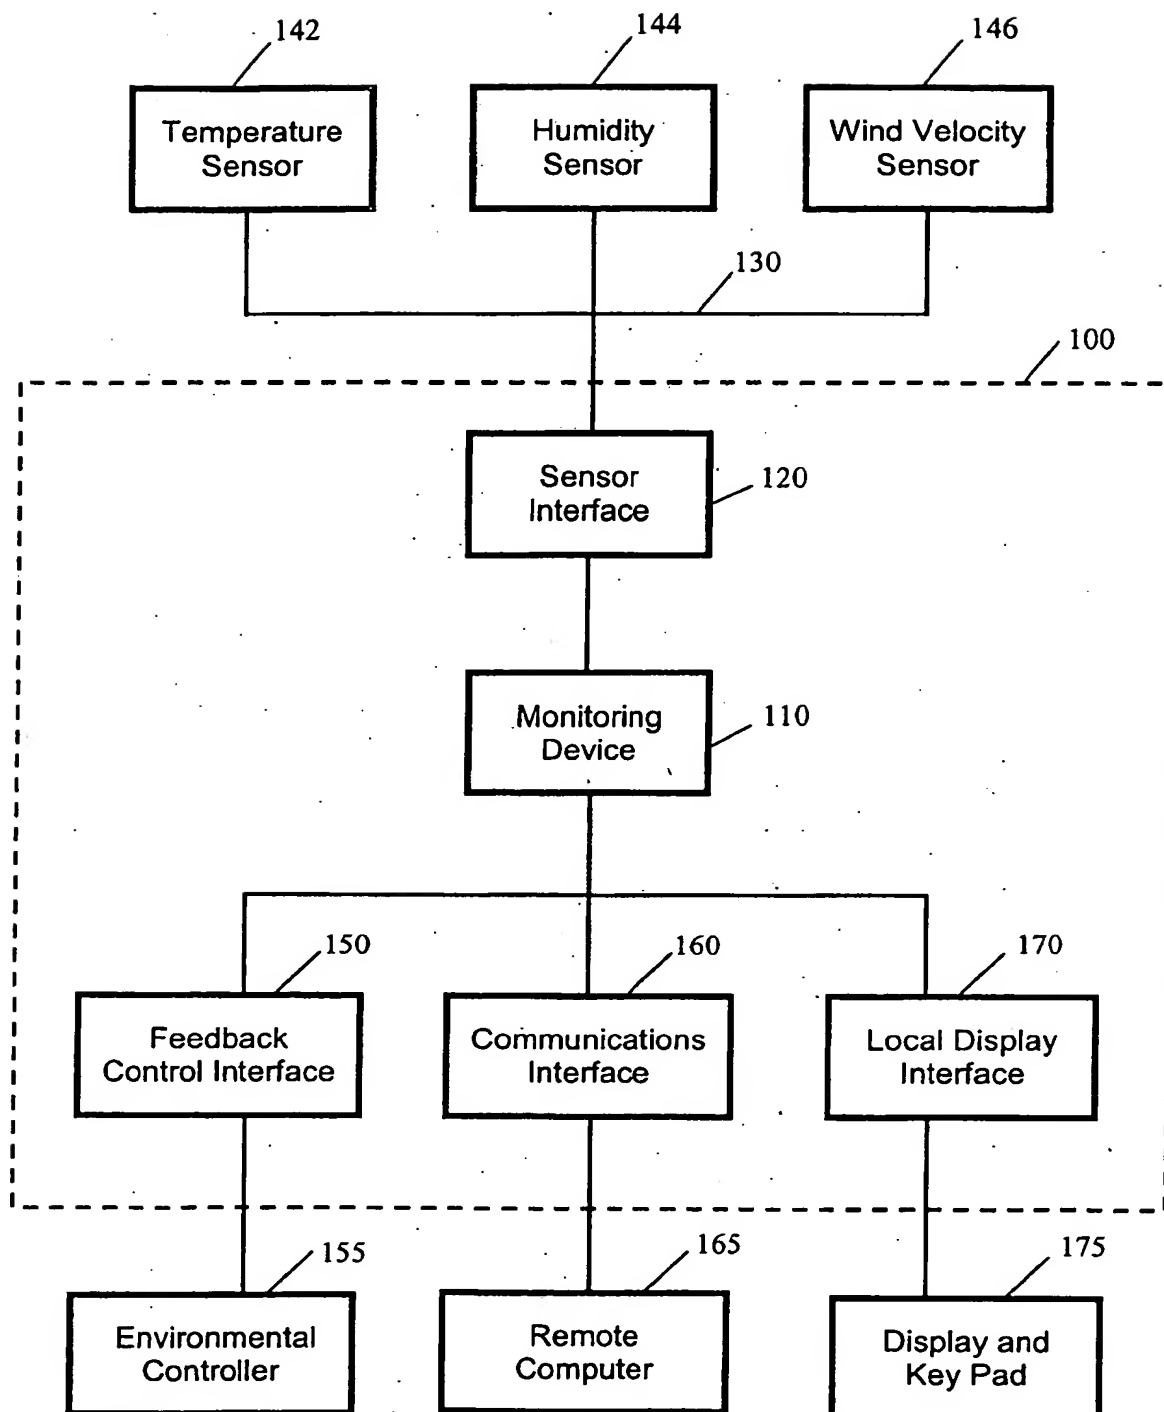
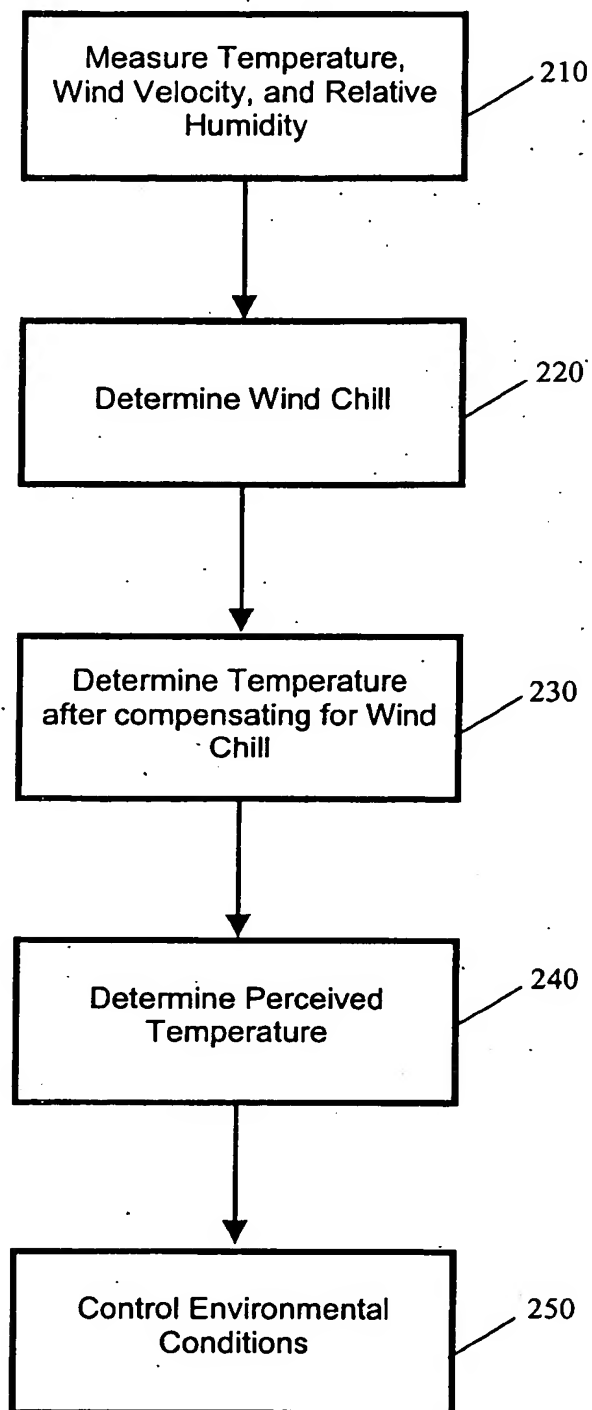
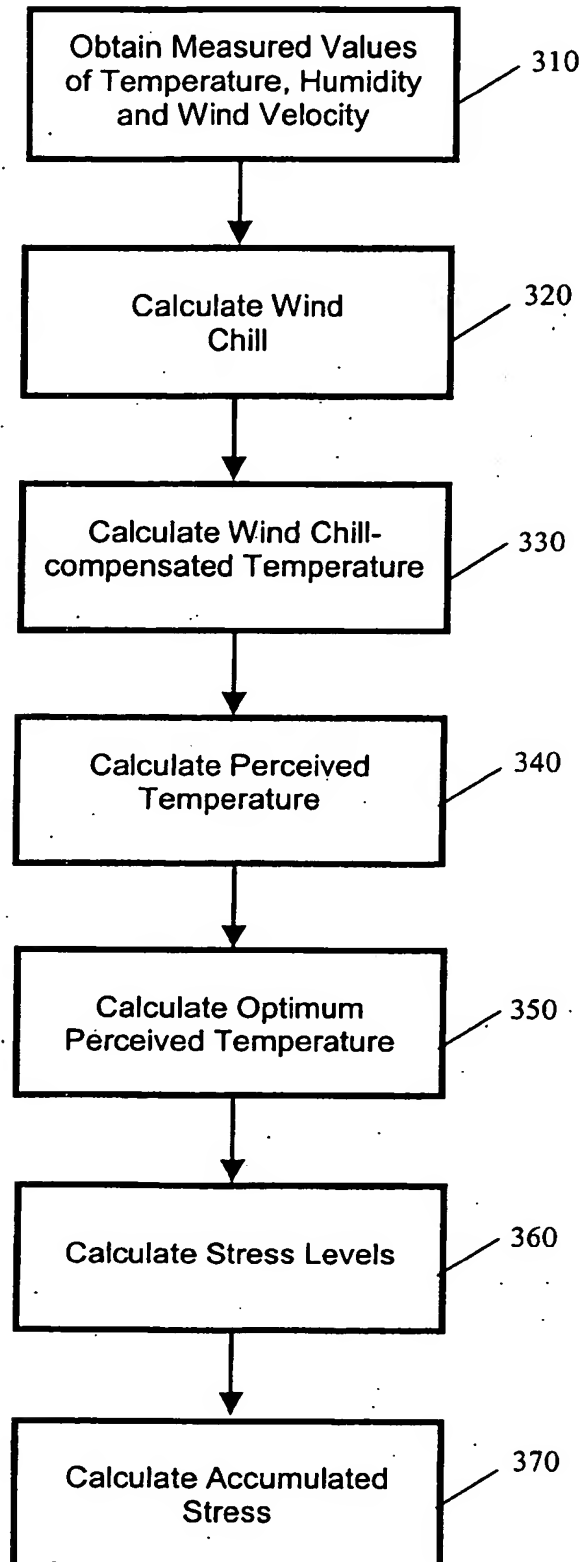


Fig. 1

**Fig. 2**

**Fig. 3**

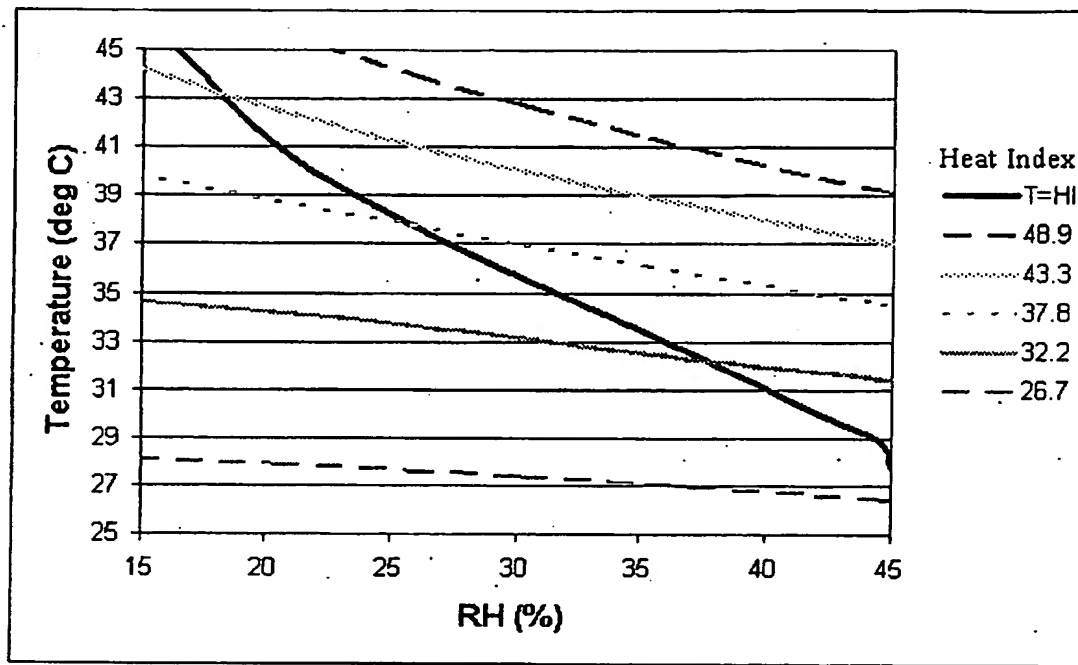


Fig. 4